

SUNLIGHT
POWER IS KNOWLEDGE

PowerBox

 **SLH 27C**

**High Frequency
Battery Charger**



SUNLIGHT
POWER IS KNOWLEDGE

SLH 27C Battery Charger

Product Characteristics and Benefits

- Single Phase input supply
230 Vac \pm 10% 50-60 Hz
- Operating temperature: -10 +45 °C
- Efficiency up to 95%
- Able to recharge all type of battery included Lithium
- LLC fully controlled pcb board
- Option available for CAN communication for Lithium
- Active PFC
- Wall mounting
- Output & Input cable included


Product Range

V/A	Model	Ah Battery	
		7 ÷ 8 h	10 ÷ 12 h
24V/120A	SLH 27C	720÷840	960÷1200
24V/140A	SLH 27C	840÷980	1120÷1400
24V/160A	SLH 27C	960÷1120	1280÷1600
24V/180A	SLH 27C	1080÷1260	1440÷1800
24V/200A	SLH 27C	1200÷1400	1600÷2000
36V/80A	SLH 27C	480÷560	640÷800
36V/90A	SLH 27C	540÷630	720÷900
36V/100A	SLH 27C	600÷700	800÷1000
36V/120A	SLH 27C	720÷840	960÷1200
48V/60A	SLH 27C	360÷420	480÷600
48V/70A	SLH 27C	420÷490	560÷700
48V/85A	SLH 27C	510÷595	680÷850
48V/100A	SLH 27C	600÷700	800÷1000
80V/40A	SLH 27C	240÷280	320÷400
80V/50A	SLH 27C	300÷350	400÷500
80V/60A	SLH 27C	360÷420	480÷600



PowerBox

SLH 27C

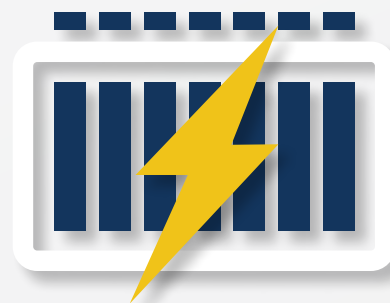

GREECE | ITALY | ROMANIA | USA

Contact us: empowerfuture@sunlight.gr

Headquarters Greece T: +30 210 6245400

European Battery Assembly (SEBA)

& Sunlight Italy T: +39 045 7651771

Industrial SRL Romania T: +40 021 351 77 77

Sunlight Batteries USA Inc. T: +1 336 579-5109

www.systems-sunlight.com

